

## YOU BIG FAKER.

Lawn care professionals demand mowers that are productive, durable, and trouble free. When the FasTrak™ was introduced in 2001, it was the first homeowner mower built to commercial standards of performance and durability. Now, for 2007, the new FasTrak 48/54 has raised the bar for high-end residential zero-turning-radius mowers. Not only are the new mowing decks larger with improved trim capacity, the FasTrak now includes even more commercial components, including the hydrostatic transmissions. The Hydro-Gear ZT2800 transmissions feature the same steel-cut rotating group as standard pump-and-motor combinations.

Commercial-duty engines are used to power the FasTrak, too. Kawasaki, Honda, and Kohler powerplants in a range from 18 to 21 horsepower cut through grass with no complaints. Now, you can have a zero-turn mower that rivals a commercial unit – at a price comparable to that of a lawn tractor.

## MOWING IS FUN AGAIN.

Remember when you were a kid and your dad let you mow with the riding lawn mower? You can recapture that fun with the Hustler FasTrak.™ Feel the wind blow through your hair at an exhilarating 8-miles per hour as you dodge and weave between lawn ornaments, bird baths, and flower beds. Race to one end of the yard, turn on a dime, and head back



Optional catchers help the FasTrak maintain a professional-quality lawn.

the other way with true zero-turning-radius maneuverability. Unfortunately, the FasTrak is so quick and productive that you will finish in as little as half the time of a comparable lawn tractor. So, your fun on the mower will be over before you know it. You'll spend time waiting for the grass to grow so you can do it again!

## NO MORE WORK.

With the Hustler FasTrak, mowing is no longer a chore. It makes mowing a pleasant escape from your otherwise hectic schedule. The FasTrak is so nimble and can trim so close, that you'll save your forearms the torture of extended weed eating, also. The 48" or 54" side-discharge/mulching decks produce a noticeably-better finished appearance to your yard. You'll be the envy of the neighborhood. At least, until your neighbor runs out and buys a Hustler.

Your grease gun will get lonely, too. The Hustler FasTrak is the simplest-to-maintain mower in its class. In fact, there are no service requirements between oil changes. All engine service points are conveniently located at the rear of the machine, because the engine has been turned sideways for compactness, serviceability, and weight and balance characteristics.

The FasTrak is also extremely easy to operate. All controls are located within easy reach. The deck lift is foot-operated and spring-assisted to make changing cutting heights a no-strain process. The engine is in the rear, keeping noise and heat away from the operator. The steering levers are adjustable to nearly any size individual. Also, Hustler has patented its automatic park brake system which is built-in to the steering levers.

Hustler stands behind the FasTrak with the best warranty in the industry. A four-year, bumper-to-bumper parts and labor warranty covers the whole machine (excluding separate engine warranties). There are lifetime warranties on the tractor frame and the leading edge of the mowing deck, also. The FasTrak is so durable, it even offers a one-year commercial warranty!

# FasTrak™ 48/54 Specifications



	48" Deck Models			54" Deck Models	
<b>Model</b>	Kawasaki	Honda	Kohler	Kawasaki	Honda
<b>Horsepower</b>	19	18	19	21	20
<b>Displacement</b>	585 CC	614 CC	597 CC	675 CC	614 CC
<b>No. of Cylinders</b>	2	2	1	2	2
<b>Max. Torque</b>	36.6 ft lbs @ 2000 rpm	31.8 ft lbs @ 2500 rpm	36.0 ft lbs @ 2200 rpm	38.4 ft lbs @ 2400 rpm	32.5 ft lbs @ 2500 rpm
<b>Models Available</b>	19/48	18/48	19/48	21/54	20/54

**Starter** 12-volt (.8 kw) (see engine manufacturer specs)  
**Ignition** Electronic  
**Charging System** 12-volt, 15-amp (see engine manufacturer specs)  
**Fuel** Unleaded gasoline (see engine manufacturer specs)  
**Fuel Filter** Replaceable, automotive-type  
**Cooling** Air cooled, fly-wheel fan  
**Governor** Mechanical

**Traction Drive System**  
**Type** Dual hydrostatic. Commercial-duty Hydro-Gear ZT 2800. Hydraulic system operates on 20W50 motor oil.  
**Hydrostatic Drive** V-belt drive from engine crankshaft  
**Ground Speed** Infinitely variable: 0-8 mph (0-12.9 kph) forward, 0-5 mph (0-8 kph) reverse  
**Steering** Twin-lever SmoothTrak™ steering provides independent control of each drive wheel. Speed, forward, reverse, brake, and turns are all controlled with hand-operated controls  
**Turning Radius** True zero turning radius. Turns within its own length. Counter-rotating, independent drive wheels  
**Fuel System Capacity** 10 US gal (37.85 l)  
**Brakes**  
**Service:** Hydrostatic dynamic braking  
**Parking:** Internal transmission mechanical brake. When steering levers are placed in neutral position, integral park brakes are automatically engaged  
**Mower Drive** Single V-belt drive from engine with electric clutch. Spring tension idler for extended belt life  
**Safety Features** Operator presence system connected to deck and drive clutches. Stabilizer rollers at rear of tractor

**Construction** Mainframe is 1.5 in x 1.5 in x .188 in (3.8 cm x 3.8 cm x .48 cm) square steel tubing. Front caster wheels mounted with roller bearings on each wheel. Front caster forks are .375 in (.95 cm) steel  
**Deck Lift** Foot-operated deck height adjustment. Pin for setting height, detent for transport position  
**Controls** Hand-operated choke, throttle, ignition switch, electric mower clutch. Integrated parking brakes  
**Indicators** Engine warning light  
**Cup Holder** Two cup holders molded into the left side fuel tank. Accommodates nearly any cup size including Big Gulp™

**Seat** Molded, cool-grey vinyl seat with adjustable armrests. Fore and aft sliding adjustment. Seat-pan suspension springs standard.  
**Blade Drive** V-belt drive to all three spindles. Spring tension idler pulleys  
**Spindles** Aluminum casting with steel shafts and sealed ball bearings  
**Flotation** Suspended mower floats on four spring-assisted chains. 4 anti-scalp wheels are standard

**Accessories**  
**Flex Forks™** Shock-absorbing front caster forks for a smooth ride and smoother cut  
**Mulch Kit** Recycles clippings under deck allowing clippings to be cut and recut, then discharged down into the grass. Reduces handling of clippings, improves appearance, and recycles nutrients back to the soil  
**Catcher** Commercial-duty, 8 bushel, rear-mounted, two-bag catcher  
**Personalized Bumper** Have your name laser-cut into the rear bumper of your mower. Ask your dealer for details.  
**Fusion™ Blades** High-lift blades with a patented Fusion edges that stay sharp as much as 2 to 3-times longer  
**Gator™ Blades** Patented mulching blade design  
**Wavy Blades** Improved performance for mulching  
**Other Accessories** Tire Chains, Hour Meter, Steering Lever Extension Kit, Weight/Utility Box

**Deck**  
 48" and 54" Side-Discharge Decks  
**Type** Free-floating mower using three blades with center blade to the front. Mower is suspended at the corners. Includes 4 deck-mounted rollers to improve flotation in rolling and uneven terrain  
**Deck Lift** Raise and lower deck from driver's seat with simple foot-operated deck height adjustment. Pin for setting height, transport position. Change cutting heights, hop curbs and trailer more easily  
**Construction** .125 in (.317 cm) welded steel. Solid 1 in x .375 (2.55 cm x .95 cm) steel bars reinforce impact areas on trim edges. Commercial-style box-section reinforced front edge. Reinforcements welded onto spindle mount areas. Molded rubber discharge chute  
**Cutting Heights** Foot-operated deck height adjustment. Pin for setting height, detent for transport position. Height adjustment in .25 in increments from 1.5 in to 4.5 in (3.81 cm to 11.43 cm)  
**Mowing Blades** Heavy-duty, heat-treated, high-lift steel blades

	Kawasaki 19/48	Honda 18/48	Kohler 19/48	Kawasaki 21/54	Honda 20/54
<b>Engine Model</b>	Kawasaki	Honda	Kohler	Kawasaki	Honda
<b>Horsepower/Deck</b>	19/48	18/48	19/48	21/54	20/54
<b>Tires</b>					
<b>Front:</b>	11 x 4 – 5, rib tread	11 x 4 – 5, rib tread	11 x 4 – 5, rib tread	11 x 4 – 5, rib tread	11 x 4 – 5, rib tread
<b>Drive:</b>	18 x 8.50 – 8, turf tread	18 x 8.50 – 8, turf tread	18 x 8.50 – 8, turf tread	18 x 9.50 – 8, turf tread	18 x 9.50 – 8, turf tread
<b>Mower</b>	48 in side-discharge	48 in side-discharge	48 in side-discharge	54 in side-discharge	54 in side-discharge
<b>Mowing Blades</b>	16.5 in x 2.5 in x .20 in	16.5 in x 2.5 in x .20 in	16.5 in x 2.5 in x .20 in	18.5 in x 2.5 in x .20 in	18.5 in x 2.5 in x .20 in
<b>Blade Tip Speed</b>	18,045 fpm	18,045 fpm	18,045 fpm	18,200 fpm	18,200 fpm
<b>Width of Cut</b>	47.1 in (119.63 cm)	47.1 in (119.63 cm)	47.1 in (119.63 cm)	53.1 in (134.87 cm)	53.1 in (134.87 cm)
<b>Trim Capacity (left side)</b>	2.0 in (5.08 cm)	2.0 in (5.08 cm)	2.0 in (5.08 cm)	4.5 in (11.43 cm)	4.5 in (11.43 cm)
<b>Cutting Height</b>	1.5 in to 4.5 in, .25 in increments (3.81 cm to 11.43 cm, .64 cm)	1.5 in to 4.5 in, .25 in increments (3.81 cm to 11.43 cm, .64 cm)	1.5 in to 4.5 in, .25 in increments (3.81 cm to 11.43 cm, .64 cm)	1.5 in to 4.5 in, .25 in increments (3.81 cm to 11.43 cm, .64 cm)	1.5 in to 4.5 in, .25 in increments (3.81 cm to 11.43 cm, .64 cm)
<b>Dimensions</b>					
<b>Height</b>	39.8 in (101.10 cm)	39.8 in (101.10 cm)	39.8 in (101.10 cm)	39.8 in (101.10 cm)	39.8 in (101.10 cm)
<b>Length</b>	70.92 in (180.14 cm)	70.92 in (180.14 cm)	70.92 in (180.14 cm)	70.92 in (180.14 cm)	70.92 in (180.14 cm)
<b>Overall width</b>	51.77 in (131.50 cm) w/chute up	51.77 in (131.50 cm) w/chute up	51.77 in (131.50 cm) w/chute up	61.30 in (155.70 cm) w/chute up	61.30 in (155.70 cm) w/chute up
<b>Tire-to-tire width</b>	43 in (109.22 cm)	43 in (109.22 cm)	43 in (109.22 cm)	47 in (119.38 cm)	47 in (119.38 cm)
<b>Weight</b>	790 lbs (358.34 kg)	790 lbs (358.34 kg)	790 lbs (358.34 kg)	815 lbs (369.67 kg)	815 lbs (369.67 kg)



For more information online : [hustlerturf.com](http://hustlerturf.com) HUSTLER  
 HUSTLER TURF EQUIPMENT • HESSTON, KANSAS 67062 • 1-800-395-4757



# FasTrak™ 48/54






# PROFESSIONAL MOWING COMES HOME!™

## HUSTLER FASTRAK Z FEATURES

48" and 54" welded side-discharge decks with optional mulching kits and a lifetime warranty on the leading edge.

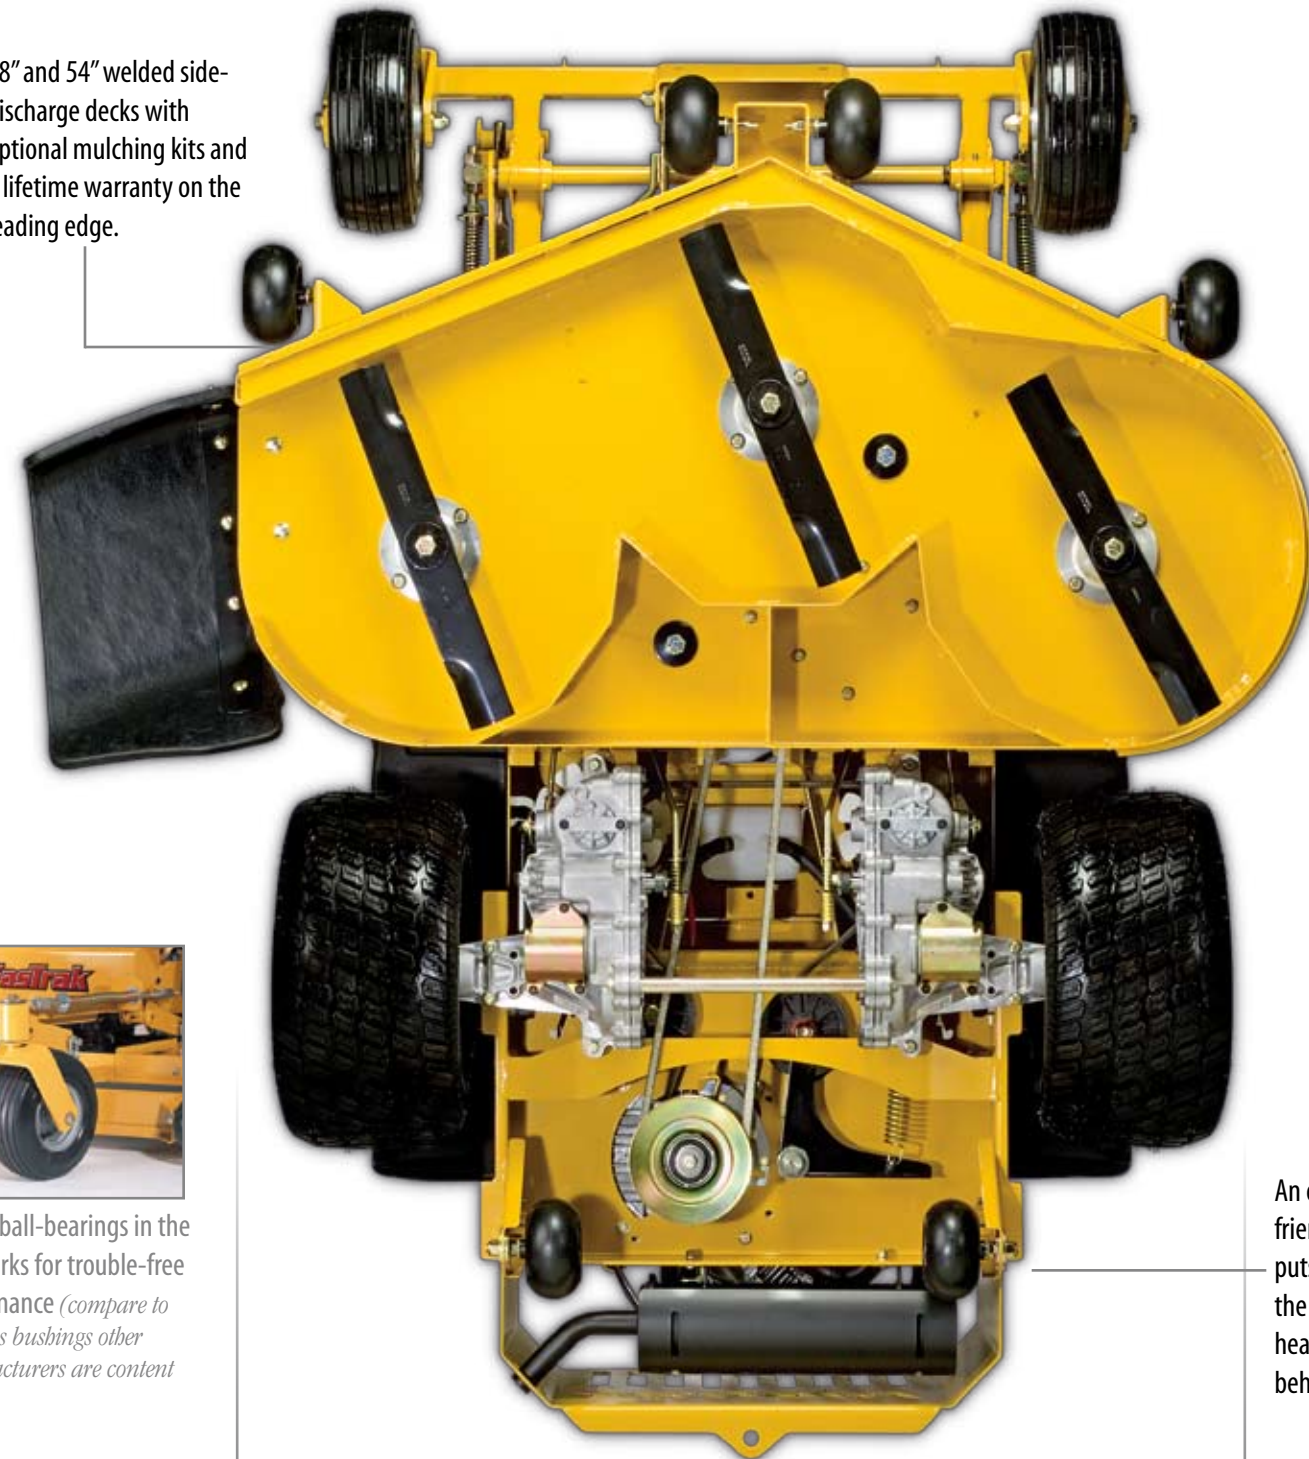

Sealed ball-bearings in the front forks for trouble-free performance (compare to the brass bushings other manufacturers are content to use).

A wide stance and a low center of gravity for unmatched performance on slopes.

An operator-friendly design that puts all the noise of the engine and the heat of its exhaust behind you.



### BEST WARRANTY\* IN THE BUSINESS

- Four-Year limited parts and labor warranty
- Lifetime warranty on the tractor frame
- Lifetime warranty on the leading edge of the deck
- 1-year commercial warranty


\*See dealer for details on Hustler warranties.

The Fastrak™ is the first residential mower built to commercial standards of performance and durability. In fact, the Fastrak is so tough, it carries a full 1-year commercial warranty!

The Fastrak cries out for head-to-head comparisons, for the kicking of some tires. Examine any aspect of the Fastrak's design or construction; feel the thickness of its steel; look carefully at its powertrain; spend a solid 15 minutes in the operator's seat... do so, and you'll want to take one home with you.

In terms of its conveniences, the Fastrak is operator-friendly in the extreme, comfortable in the way that only mowers meant for all-day, everyday use can be.

- SmoothTrak™ steering for the smoothest, most-nimble controls in its class
- A sturdy, cushioned sliding seat with standard armrests
- 18" drive tires and 11" caster tires for a soft ride
- Adjustable (fore/aft, up/down) steering levers for ideal positioning
- Large, easily reachable cupholders

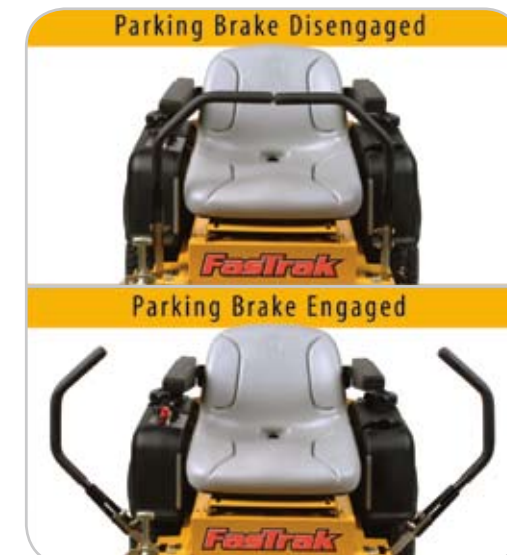

Patented automatic parking brake system is operated by the steering arms.



SmoothTrak™ steering is the result of innovative engineering using commercial-duty Hydro-Gear ZT2800 hydrostatic transmissions.



Easy, foot-operated height adjustment in quarter-inch increments from 1" to 4.5" - no stress, no strain, no scraped knuckles.

More engine options - Kawasaki, Honda, or Kohler.

New! Flared tanks with sight line - see your fuel level all the time



New! 48" and 54" decks add increased trimming capacity.